



58

(2UZ)

1M

/

1_e


CF

3UZ


2



微信二维码



微博二维码

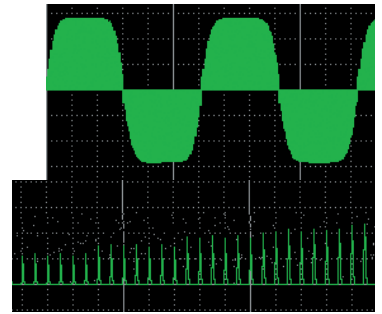

9018-50
3283






P9000

4ch




C3914C>789.018|202DD|Tc 0.013 Tw -7.861 40923 Td -0.02488.060 Cx (AC1780511-57.623 36> 1.73)-0.018 TcE.96


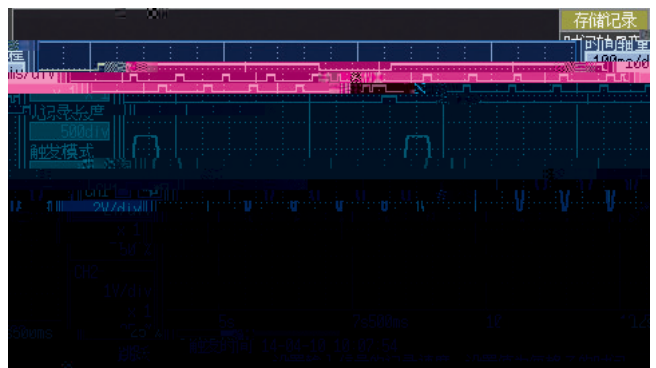




[Redacted text]

[Redacted text]



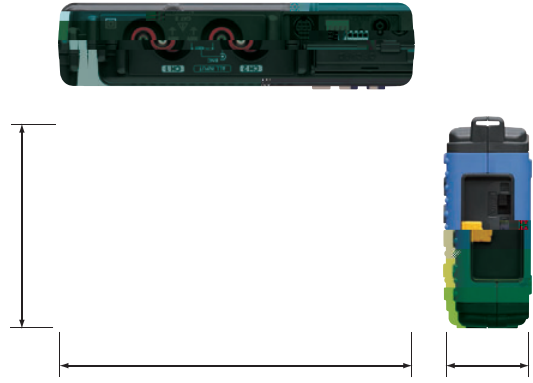


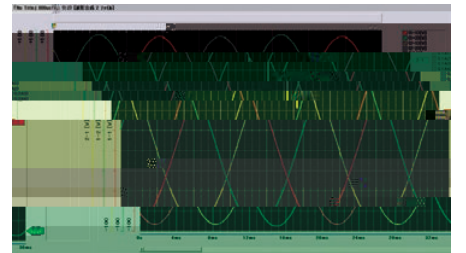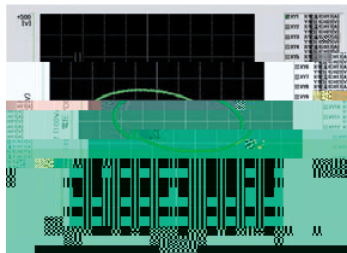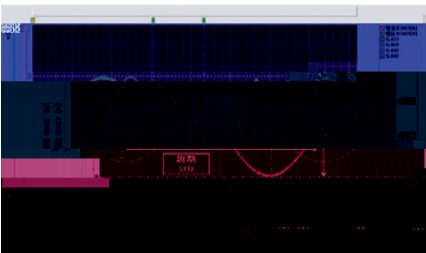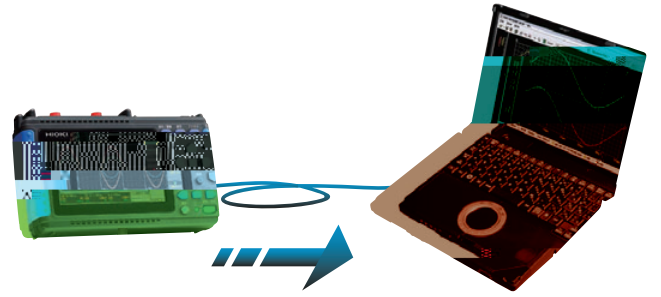


(

| | | |
|---|----|---|
| | | () (5060HzDC) |
| | | 2ch+ 4ch (GND) |
| | | IMS/ (1Ps ch) |
| | | 12bit× 2MW/ch |
| | | CF TYPE1 ()× 1 2GB FAT/ FAT32 () |
| | | 5 (25) 9780 AC (9780 100) |
| | | USB USB2.0 B × 1 PC CF PC PC |
| | | 4.3 TFT (480× 272) |
| | | 20div()× 10div() (1 div = 20dot × 20dot) |
| | | () |
| / | fi | 0 40 80% rh -10 50 80% rh |
| | | Safety EN61010 EMC EN61326 EN61000-3-2 EN61000-3-3 |
| | | AC Z1005 AC 100 240V 5060Hz 9780 2 (Z1005) 25 DC DC 10 16V (Z1005) 3m) |
| | | 30VA (AC 9780) 10VA (DC 9780) 3VA (9780) |
| | | 200 (25) AC 5 30 |
| | | 176W× 101H× 41Dmm 600g(9780) |
| | | × 1 AC × 1 Z1005× 1 × 1 USB × 1 CD-R(8870 21)× 1 9809× 1 |
| / | | fi |
| | | 2ch 4ch (2.5V) ON/OFF AND/OR |
| / | fi | 5060Hz) (|
| | | 0.5% f.s. (f.s.=10div) |
| / | fi | 1 0 × 0 100 5 |
| | | 1ms : 5V s s |

? D**)" Z%"



| 500A | 5000A | 50/60Hz |
|---|--------------------------|---------------|
|  | 9018-50 | |
| | AC | f 40Hz |
| | 3kHz AC10 500A | |
| | 0.2VAC/ | |
| | 9132-50 | |
| | AC | f 40Hz |
| | 1kHz AC20 1000A | |
| | 0.2VAC/ | |
| | CT9667-01/-02/-03 | |
| | AC | |
| | 10Hz-20kHz AC 5000A/500A | AC 500mV/f.s. |
| | 100mm- 254mm | |